

User Manual

F2 Auto Tamper




Content

1 Preface	-1-
2 Product Configuration	- 2 -
3 Setup	- 3 -
3.1 Placement	- 3 -
3.2 Assembly	- 3 -
4 Operation & Adjustment	- 3 -
4.1 Operation	- 4 -
4.2 Adjustment	- 4 -
5 Cleaning& Maintenance	- 5 -
6 Maintenance Records	- 6 -

1. Preface

- a. Please read this manual carefully before using the appliance, because the manual contains important instructions for the safety, operation and maintenance of the appliance. Please keep this manual properly. The manufacturer reserves the right to make and change the product and manual.
- b. When opening the package, please check carefully to make sure that the appliance does not show any signs of damage. If you have any questions, please do not use the device and contact a qualified professional.
- c. Packaging materials must be placed out of the reach of children, because such materials may pose a potential threat to children. Please keep this packaging until the end of the warranty period.
- d. Do not throw away at will. Please dispose of the packaging materials of the product in accordance with relevant laws and regulations.
- e. You decide not to use the device, please be sure to unplug the power plug to ensure the safety of the electrical appliance. For information on the disposal of electrical components, please consult a professional company.
- f. If power lines and plug were broken, please do not use this device. Maintenance should ask for authorized technician. Please consult local distributor or maintenance institute.
- g. Do not put hands between portafilter and support.
- h. Please do not change the equipment. If damaged because of not following the instruction, supplier should not take responsibility.

2. Structure & Specification

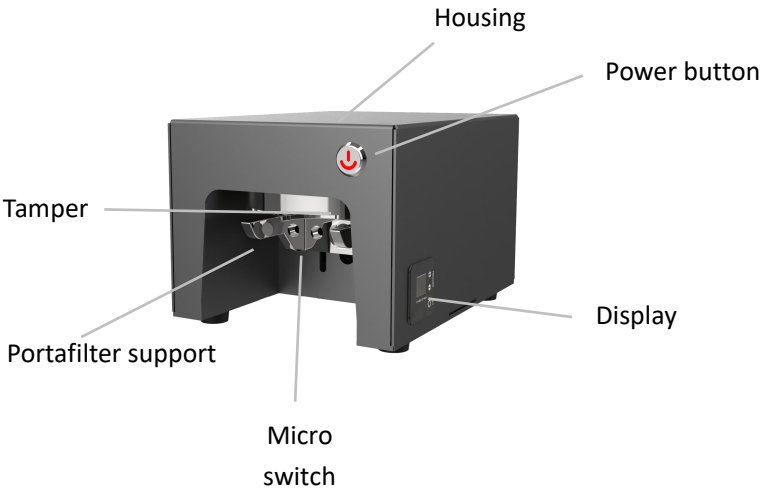

Model	F2	Tamper diameter	58mm
Power	50W	Motor	DC24V
Machine size	200*245*170mm	Package size	375*260*250mm
G.W	6.8Kg	N.W	6.2Kg

3. Set up and assembly

3.1. Set up

The appliance must be installed by professional and technical personnel.

Incorrect installation may cause personal injury or product damage, for which the manufacturer will not bear any responsibility.

Clean the device carefully after installation, please follow the cleaning and maintenance instructions.

- a. Plug power line into back socket.
- b. Plug in the right ground socket.
- c. Press the power button to start


3.2. Assembly

Adjustable 58mm portafilter support for all kinds



Precaution :

Turn off the power. Adjust the two screw to same height. Follow below steps:

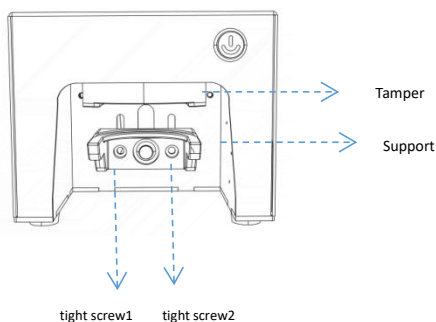


1. Pull out the power line.
2. Turn machine upside and fix
3. Loose two tight screws
4. Put portafilter in the support, press with the block.
5. Tighten the screw not fully.
6. Take out portafilter, tighten the screws.
7. Put portafilter in the support, if loose, repeat the steps 2~5.

4. Operation and adjustment

4.1 Operation

1. Press the power button.
2. After flatting the powder, put the portafilter in the support.
3. Micro switch automatically inspect the portafilter, and activate the tamper.
4. After the cycle, tamper stops and back to initial position. Take out portafilter and finishes the tamping.

4.2 Pressure adjustment

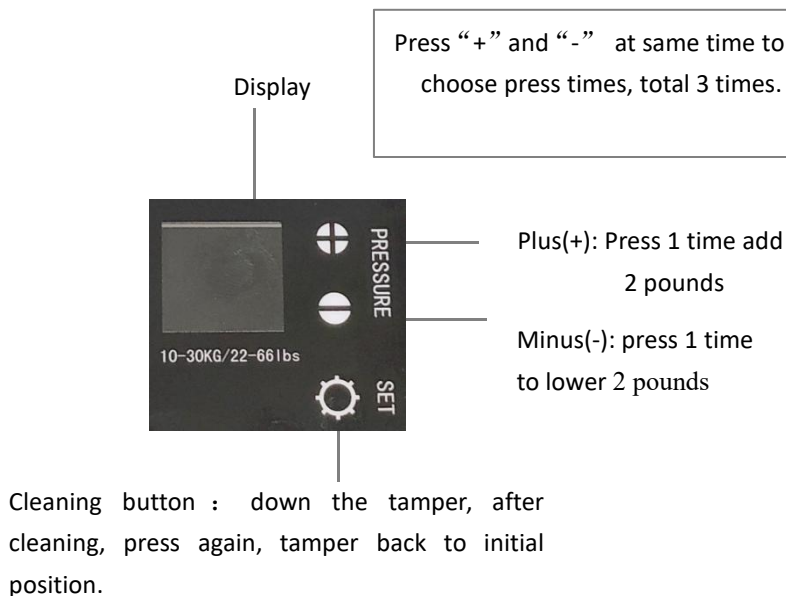

5. Cleaning and maintenance

- Before cleaning, please pull out the power plug to disconnect the electrical power.
- Do not use water spray to clean the appliance.
- Do not install electrical appliances in rooms where water sprays are used for cleaning.
- Appliances can only be cleaned regularly by professional and technical personnel.
- Do not use corrosive products, as such products may tarnish shiny parts.
- Please contact professional and technical personnel for a thorough cleaning operation if necessary.

6. Maintenance record

Date		Product name&Model	
Serial Number			
Username		Phone/Mobile	
Address			
Problem			
Repair result	Repair person: Date:		
The warranty period of this machine is one year (calculated from the day it leaves the factory). During the warranty period, if the fault is caused by the quality of the product itself, please contact our customer service staff for free accessories or replacement services. The range of accessories provided for compensation in the following cases: 1. Without warranty proof. 2. Failures caused by operating the machine not in accordance with the requirements of the manual. 3. Failure, scratches or damage caused by moving or falling. 4. Damage caused by inappropriate preservation, maintain or usage. 5. Easy damaged pieces and present accessories are not concerned. 6. Failure or damage caused by force majeure.			

Date		Product name&Model	
Serial Number			
Username		Phone/Mobile	
Address			
Problem			
Repair result	Repair person: Date:		

The warranty period of this machine is one year (calculated from the day it leaves the factory). During the warranty period, if the fault is caused by the quality of the product itself, please contact our customer service staff for free accessories or replacement services.

The range of accessories provided for compensation in the following cases:

1. Without warranty proof.
2. Failures caused by operating the machine not in accordance with the requirements of the manual.
3. Failure, scratches or damage caused by moving or falling.
4. Damage caused by inappropriate preservation, maintain or usage.
5. Easy damaged pieces and present accessories are not concerned.
6. Failure or damage caused by force majeure.